


Challenger Door

350/375 Series Awning Installation Guide

Date: 12/12/18


BY:AWY

****Be sure to check that Rough Opening measures to the size stated on the door label, and is square and even on all sides. Challenger Door sizes doors to properly fit whatever opening our customer has. Be sure that the opening has proper framework supporting it (ie; aluminum/steel tubing or lumber). For any clarification on how to measure Rough Opening visit <https://www.challengerdoor.com/measure/> ****

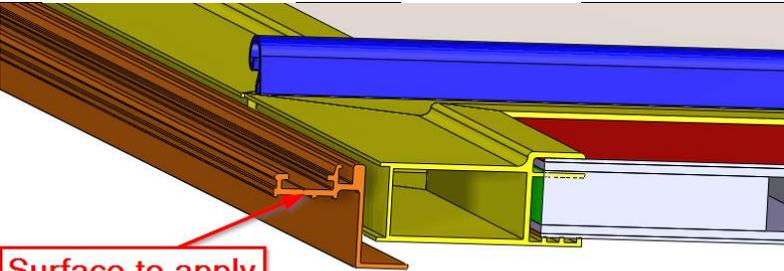Tools and Supplies needed	<ul style="list-style-type: none">- screw gun- #8 or #10 screws 1" to 1½" long (Self-drilling screws are recommended)- closed cell foam tape or butyl tape- water sealing caulk and caulk gun- plastic or wood shims 1/8" to 3/16" thick.	
Place door in opening	<ol style="list-style-type: none">1. Clean out and install closed cell foam or butyl. This helps to insure a tight seal once door is installed.2. Center door in opening it insure proper fit.	 <p data-bbox="1150 1268 1415 1357">Surface to apply foam or butyl</p>

Secure door into opening

1. Hold door tight to the top of the opening and insert 1 screw in each corner of the door.
2. Add a screw close to the center at the top to ensure that the top of the door where the hinge is straight.
3. Check the reveal (gap) between the door frame and the mounting frame on all four sides checking, verifying that it is uniform all the way around.
4. Once uniform reveal is achieved, add a screw to each side on the bottom.
5. Open and close the door to insure proper function. ****Shims may be needed to ensure proper seal and function****
6. Finish installing screws around the whole door no less than 12" apart.
7. Install screw cover and drip cap if the awning is equipped with them.

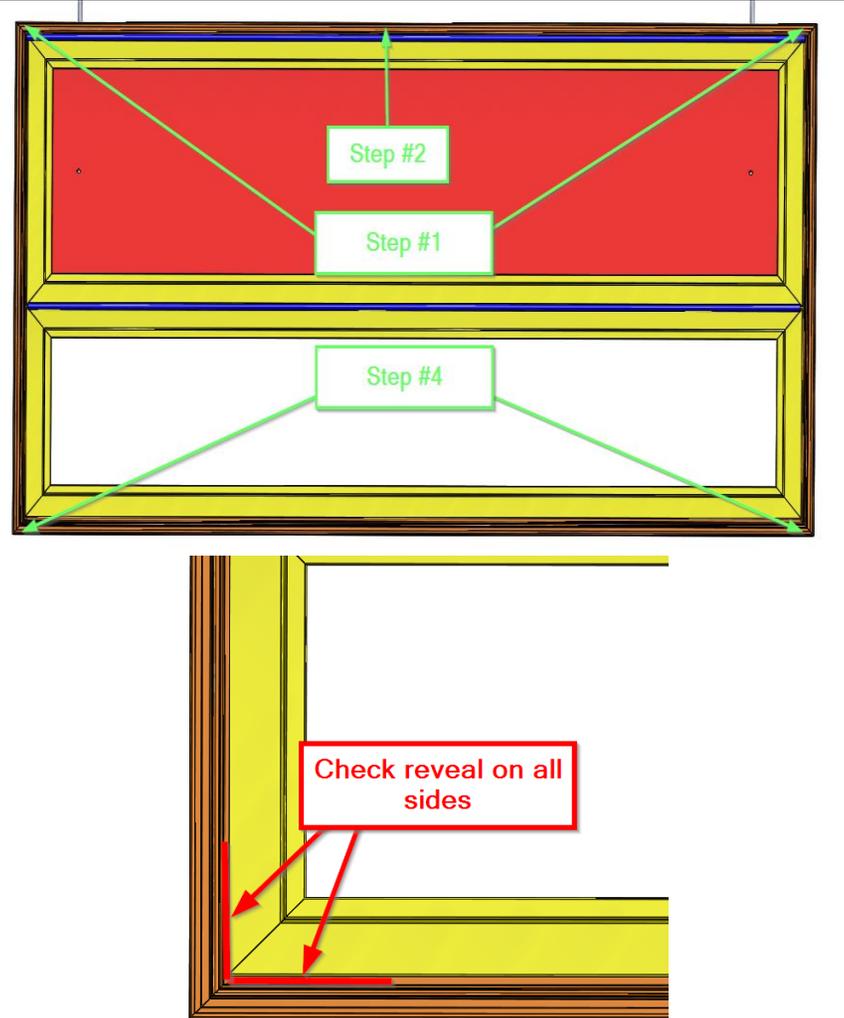

Sealing the Door

1. To ensure proper bond. Clean the mounting frame and surface it bonds to.
2. Caulk around the mounting frame to the unit sidewall.